

MPE-01 X

Patch Panel Cat5e, 12 ports, Wall Mount



Where X = Color:

X = W = White

X = K = Black

Features:



Material	
Panel	SPCC, 1.5mm thickness
RJ45 Jack Housing	ABS, UL 94V-0
RJ45 Contact Bracket	PC, UL 94V-2
RJ45 Jack Contact	Phosphor Bronze with Nickel Plating
RJ45 Jack Contact Finish	50 micro-inch Gold Plated on Plug Contact Area
IDC Housing	PC + Glass Fiber, UL 94V-2
IDC Terminal	Phosphor Bronze with Tin Plating
Jack Bracket Set	ABS, UL 94V-0
Panel Bracket	ABS, UL 94V-0
PCB	FR4, UL 94V-0
Performance	
Wiring	T568A & T568B
Insertion Force	20N max
Retention Strength	7.7kg between jack and plug
Operation Temperature	-10C to 60C
Jack Life (Mating Cycles)	750 cycles per min
IDC	Suitable for 22-26 AWG stranded and solid wire, compatible with both 110 and krone punch down tools
Compliance	The Cat5e transmission performance follows the ANSI/TIA/EIA 568 B.2 standard

MPE-01 X

Patch Panel Cat5e, 12 ports, Wall Mount



Diagram:

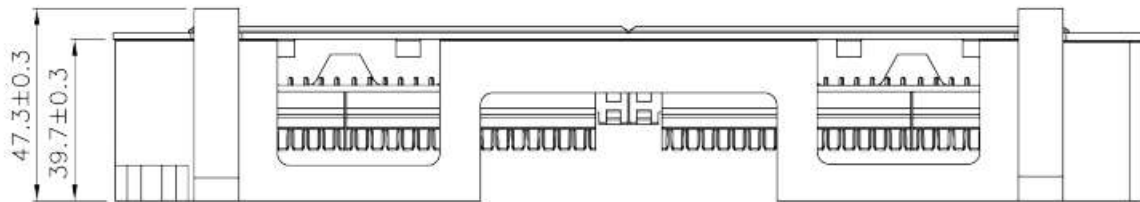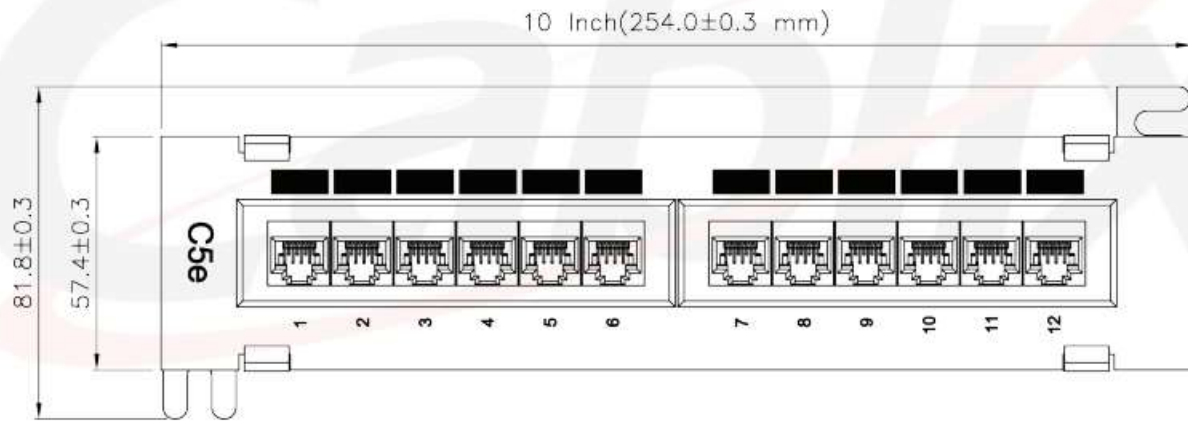

CAT.5E 6 PORT PCB MODULE

