

OSCV-24A

Fiber Optic Vertical Closure (Black)



OSCV-24A is a dome type fiber optic splice closure that can load 1pc PLC 1:8 splitter and 9pcs SC simplex adapters for fiber splicing & distribution.

Features:

Specifications	
Dimensions (mm)	220 x 119.4 x 300
Cable ports	<ul style="list-style-type: none">• 2pcs round port ϕ15mm• 2pcs round port ϕ13mm – Bleeding Port• 8pcs 2*3mm drop cable ports.
Max Capacity of splice tray	1
Max Capacity	24
Material	High impact resistance PP materials with UV

- The 2 Cable entry without cutting.
- cable ports are heat shrink sealing.
- Outdoor aerial hanger and pole holding.
- Can load 1pc PLC 1:8 splitter and 9pcs SC simplex adapters

Accessories:


Item	Specification	Qty
Heat protect shrinkable sleeve	L=60mm	As per using capacity
Cable tie	L=120mm	6pcs
Heat shrinkable cable tube	Φ 30*120mm, black	2pcs
Aerial hanged	Stainless steel	1 set

OSCV-24A

Fiber Optic Vertical Closure (Black)



Measures:

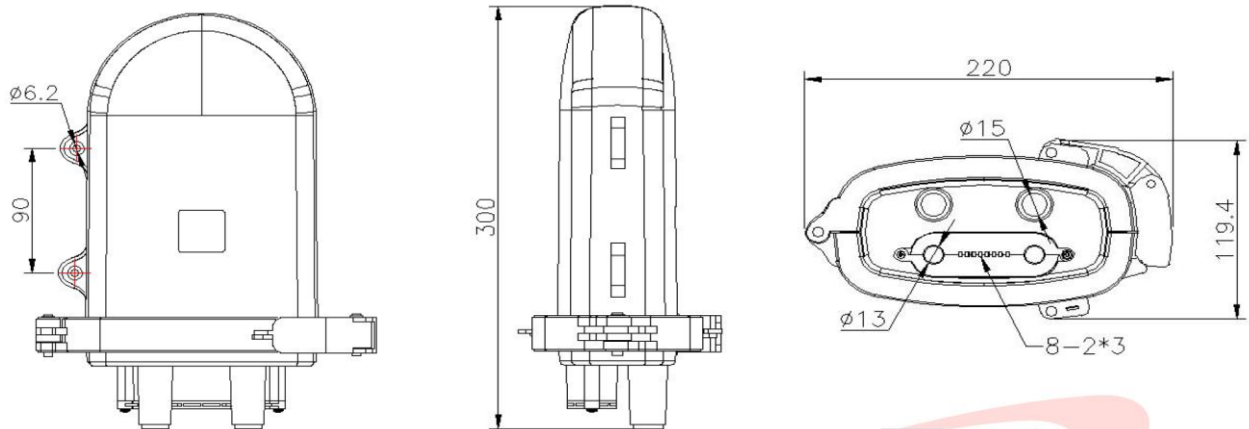

Applications:

- FTTH access network
- Telecommunication Networks
- CATV Networks
- Data communications Networks
- Local Area Networks