

OFT-CB 2S3

Pole Mounting Clamp Bracket




The bracket is manufactured from an aluminum alloy with correspondingly high mechanical strength. Its unique patented design has been developed to propose a universal fitting covering all installation situations on wooden, metal, or concrete poles.

Features:

Materials	Working Load	Weight
Aluminum Alloy	500N	0.2 Kg

Dimensions:

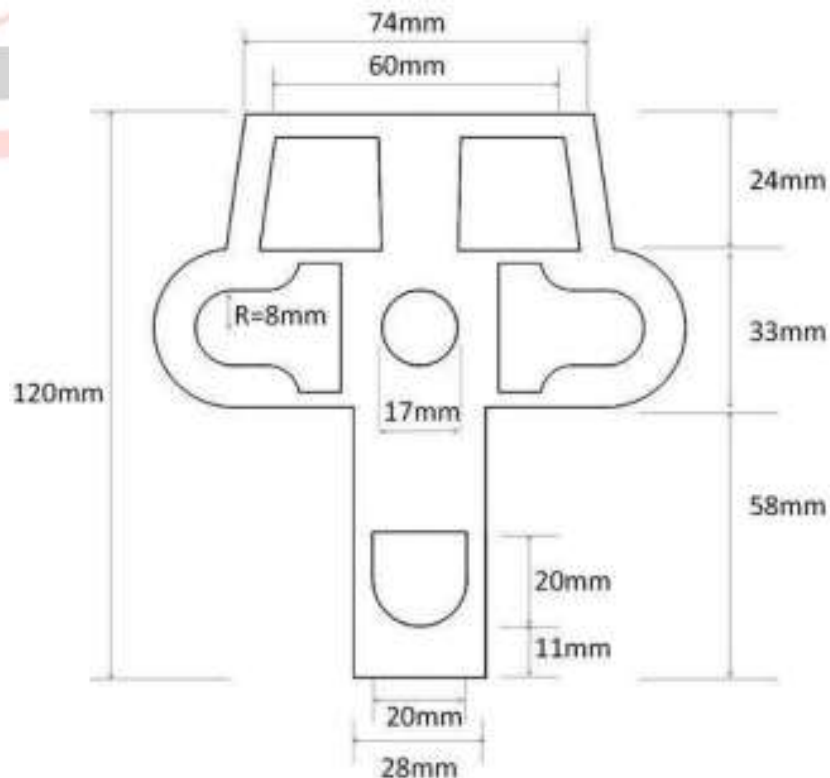

OFT-CB 2S3

Pole Mounting Clamp Bracket




Installation:

- **With steel bands:**

The bracket can be installed on any type of pole – drilled or undrilled – with two 20x0.7 mm stainless steel bands YR3470 plus two buckles YRB34 (check our pole banding products). Usually allow two bands of one meter each per bracket.

- **With bolts:**

If the top of the pole is drilled (wooden poles, occasionally concrete poles) the bracket can also be secured with a 14 or 16 mm bolt. The bolt length should be at least equal to the pole diameter + 50 mm (bracket thickness). Check our bolts

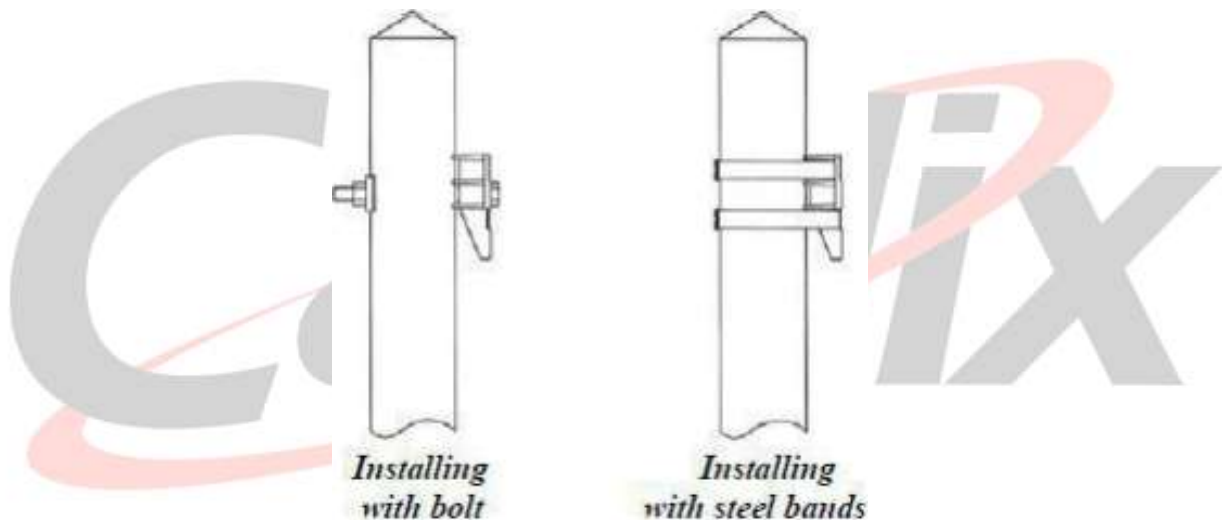

Applications:

- FTTH access network
- Telecommunication Networks
- CATV Networks
- Data communications Networks
- Local Area Networks