

OAS-LC

LC Adaptor Fiber Single-Mode Simplex/Duplex



OAS-11SA



OAS-11DA



OAS-11SU



OAS-11DU

Cablix offers a full range of LC adaptors for both APC and UPC applications. These adaptors are mainly applied for telecommunication and networking. Our fiber optic adaptors are made from zirconia Sleeves. The performance of the adapter has been carefully designed to meet the toughest Telcordia standards

OAS-11SA - Adapter Fiber Single-Mode LC/ APC Simplex

OAS-11DA - Adapter Fiber Single-Mode LC/ APC Duplex

OAS-11SU - Adapter Fiber Single-Mode LC/ UPC Simplex

OAS-11DU - Adapter Fiber Single-Mode LC/ UPC Duplex

Features:

Optical Specifications	
Typical Insertion Loss	<0.1 dB
Max Insertion Loss	<0.2 dB
Durability (500 Mating Times)	<0.2 dB

Environment Specifications	
Operating Temperature	-40°C to 75°C
Storage Temperature	-40°C to 85°C

Mechanical Specifications		
Material	Housing	Plastic (PC)
	Sleeve	Zirconia
	Clip	Stainless Steel
	Dust Cap	Plastic (PP)

OAS-LC


LC Adaptor Fiber Single-Mode Simplex/Duplex



Item is Simplex	
Body Dimension	27.5(L) *11.4(W) *7(H)

Item is Duplex	
Body Dimension	27.5(L) *12.75(W) *9.35(H)

Dimensions:

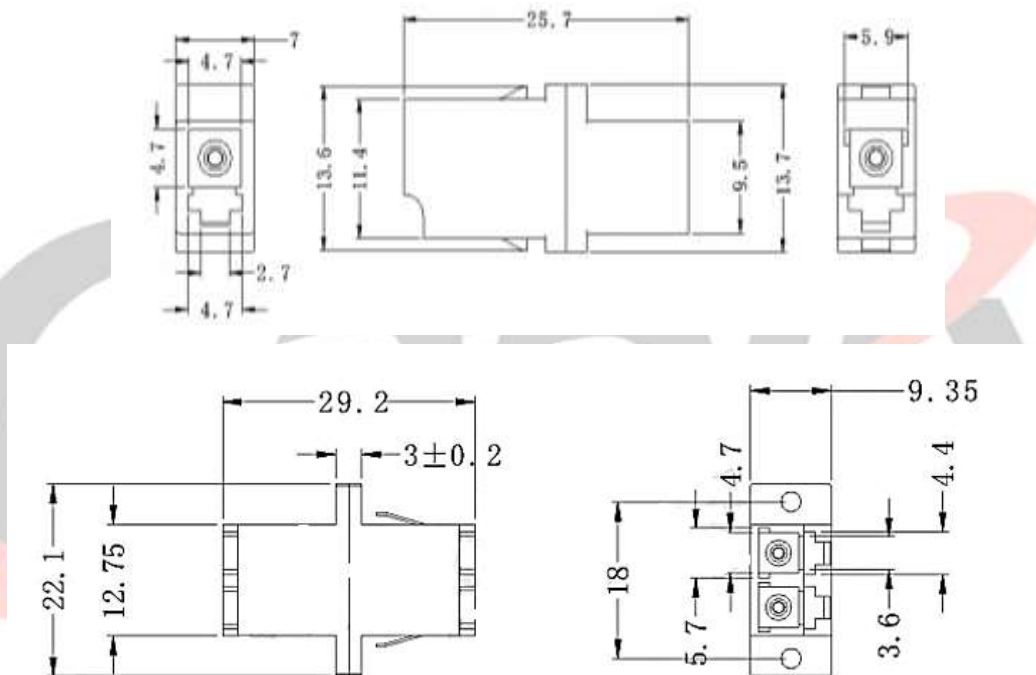

Test Procedure

Optical Characteristics, Vibration Test, Thermal Cycling, Impact Resistance, Thermal Aging, Humidity Resistance, Other.