

OTB-0648AOK

Fiber Optic Termination Box 48 FO




Fiber optic terminal box suitable for optical fiber splicing, distribution, and protection. It is practical design for fiber arrangement, and for outdoor wall mounted and pole mounted application.

Features:

Specification	
Material	ABS Plastic
Dimension (mm)	232 x 359 x 130.5 mm
Splice Trays	4pcs 1x12 individual trays Max. 48 fibers
Adapter Port	24pcs SC simplex adapters
Splitter	Can load 2pcs 1:8 PLC splitter or 1pc PLC 1:16 steel tube type splitter
Cable ports	2pcs Φ 19mm entry cable ports 24pcs 2*3mm drop cable ports
Application	Wall Mounting and Pole Mounting
IP Rating	IP65 (Outdoor use, waterproof)

Dimension:

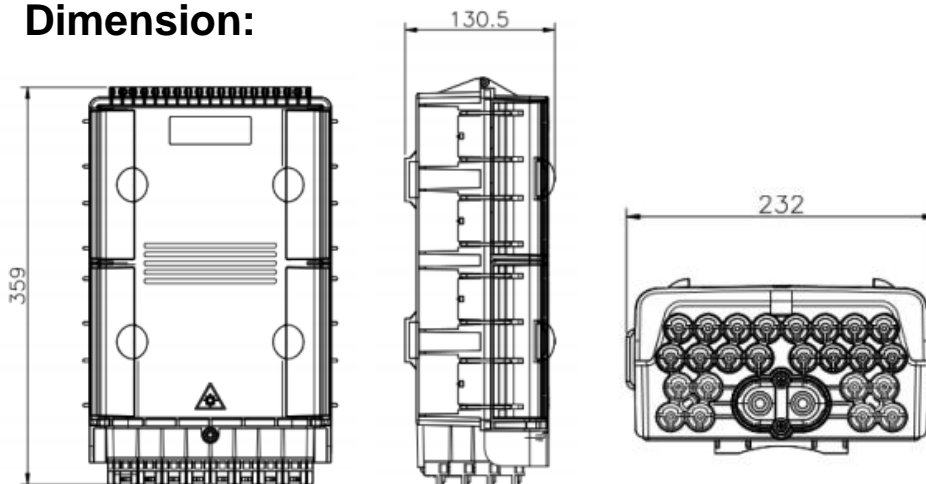

Applications:

- FTTH access network
- Telecommunication Networks
- CATV Networks
- Data communications Networks
- Local Area Networks