

# MM6S-21-100X


Optic Patch Panel 19" 24 SC simplex, ABS white



## Features:

Electrical	
Contact Resistance	<20m Ohm
Insulation Resistance	>1000M
Dielectric Strength	1000V/DC 60's can't spark over
Mechanical	
Operating Temperature	-40C to 70C
Relative Humidity	<95% (at 25C)
Durability	750 mating cycles/min
Material	
Housing	Polycarbonate (PC); Flammability Class: UL94V-0 or UL94V-2
Contacts	Phosphor Bronze, nickel plating followed with gold plating
Shielding Housing	Brass with nickel plating or steel with nickel plating

## Dimensions:

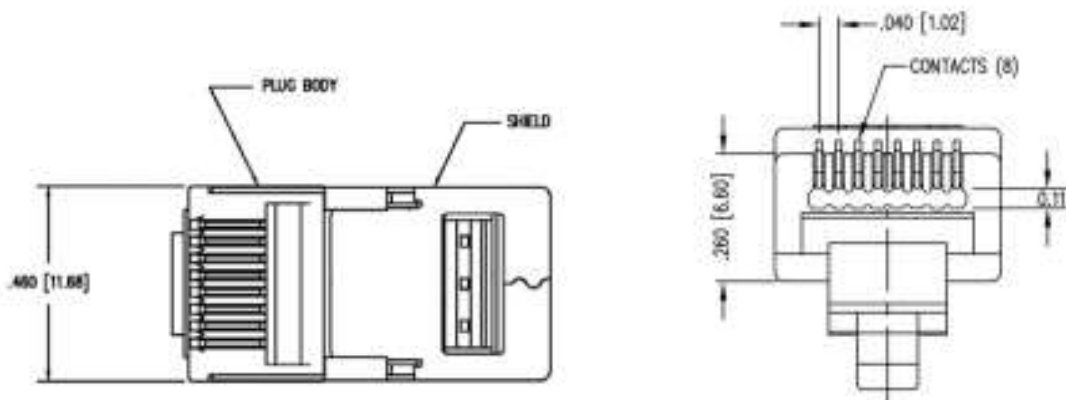

# MM6S-21-100X

Optic Patch Panel 19" 24 SC simplex, ABS white

