

MMES-21-100X


Connector Male, cat5e, RJ45 Shielded crimp, 8P8C, 2 Prong, 6um gold, Passthrough – PKT 100 units each



Features:

Electrical	
Contact resistance	<20m Ohm
Insulation Resistance	>1000M
Dielectric Strength	1000V/DC 60's can't spark over
Mechanical	
Operating Temperature	-40C to 70C
Relative Humidity	<95% (at 25C)
Durability	750 MATING CYCLES/MIN
Material	
Housing	Polycarbonate(PC); Flammability Class: UL94V-0 or UL94V-2
Contacts	Phosphor bronze, Nickel plating followed with gold plating
Shielding Housing	Brass with nickel plating or steel with nickel plating
Packaging	
Units per package	100 units each

Dimensions:

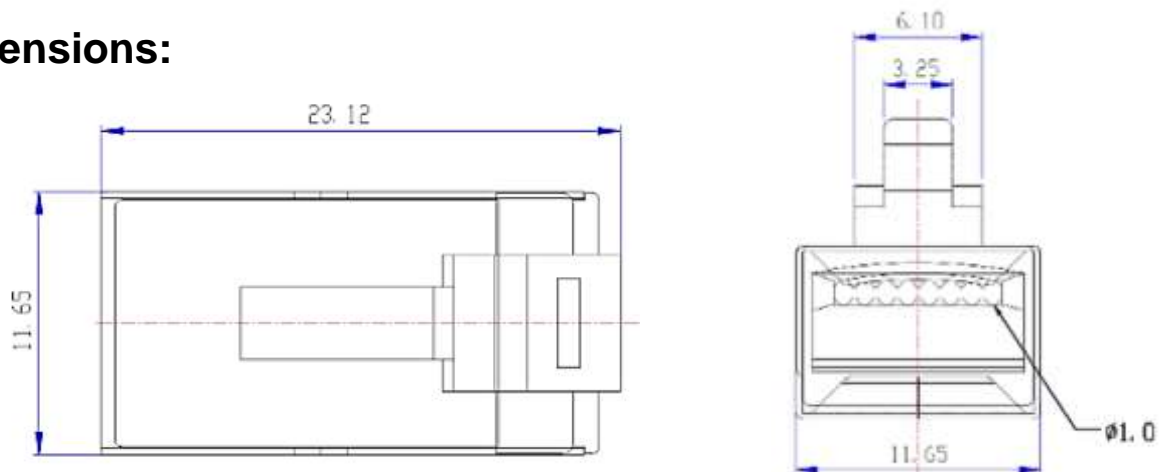

MMES-21-100X

Connector Male, cat5e, RJ45 Shielded crimp, 8P8C, 2 Prong, 6um gold, Passthrough – PKT 100 units each

