

# OSCH-12A

Fiber Optic Horizontal Closure (Black)




OSCH-12A Fiber Optic Splice Closure — Compact closure molded from high-quality ABS for reliable protection and organization of fiber splices. OSCH-12A is suitable for splicing and distributing a variety of optical cables at access or distribution points, helping maintain neat routing and secure strain relief for stable network performance.

## Features:

- Special double D box body design, light weight, compact structure.
- Rotary Internal structure, super-stratum for splicing and distributing, substratum for cable arrangement.
- Supports max 9pcs SC simplex adapter , 1X 1\*8 PLC (steel tube type) and 12 Fibers splicing.
- 4pcs 12mm Cable input&output, 8pcs drop cable ports for 2\*3mm cable.
- IP rating IP65.
- ABS material Box body.

## Applications:

- FTTH access network
- Telecommunication Networks
- CATV Networks
- Data communications Networks
- Local Area Networks

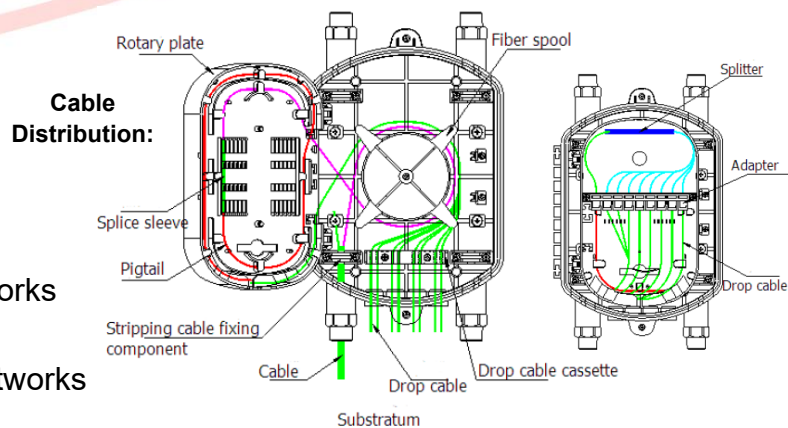

## Measures:

