

OTB 0608AOHDK

UNPOPULATED Fiber Optic Termination Box 08



OTB-0608AOHDK Fiber Optic Terminal Box — Unloaded, Cassette-Ready Plastic distribution/termination box supplied unloaded for flexible configuration in splicing and distribution tasks. Accepts an empty adapter cassette with up to 9 SC simplex adapter ports or 1 × plastic PLC splitter cassette (1×8). Supports mid-span (no-cut) feeder entry and provides 8 drop cable outputs for neat subscriber distribution and maintenance-friendly layouts.

Features:


Material	PP Impact-Resistant Plastic
Dimension (mm)	195.5 x 240 x 77.5 mm
Application	Outdoor Wall mounted or pole mounted
Splitter	• 1pc Unloaded plastic splitter cassette 1x8. • Supports 1pc PLC 1:8 steel tube type splitter
Splicing Capacity	8 Fibers
Cable Ports	• 1pc cable port M20 suitable for $\Phi 6\sim 11$mm cable entry • 1pc reserved hole suitable for M20 cable gland • 1pc oval port support $\Phi 6\sim 12$mm cable entry without cutting • 8 pcs 2*3mm FTTH drop cable output ports
Adapter Port	9 SC simplex
IP Rating	IP65

OTB 0608AOHDK

UNPOPULATED Fiber Optic Termination Box 08



Diagram:

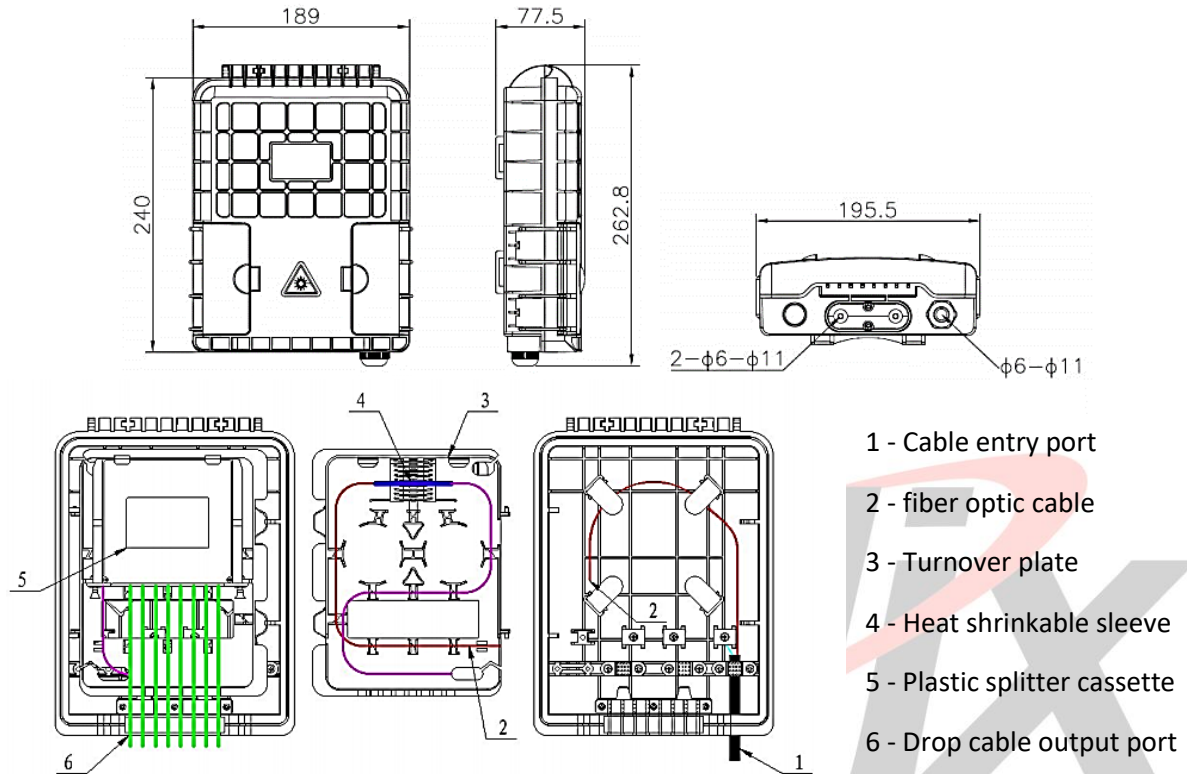

Accessories:

Product	Specification	Qty
Heat protection shrinkable sleeve	45mm*2.3*1.0	As per using capacity
Cable tie	3*120mm white	4 pcs
Countersunk Screws	C type 4*30 metal	4 pcs
Plastic Expansion Pipe	Φ6mm plastic white	4 pcs

Applications:

- FTTH access network
- Telecommunication Networks
- CATV Networks
- Data communications Networks
- Local Area Networks