

# OTB-0616AOHK-R

Fiber Optic Termination Box 16 FO



OTB-0616AOHK-R Fiber Optic Terminal Box — Plastic indoor/outdoor enclosure for splicing, distribution, termination, and protection in FTTx networks. Serves as the termination/branch point to connect drop cables with the feeder cable, providing organized space for splicing, splitter integration, slack storage, and fiber management to ensure clean routing and bend-radius control.

## Features:


| Specifications  |                                                                                                                                                         |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material        | PC+ABS material, UV resistant                                                                                                                           |
| Color           | Black, Grey, White                                                                                                                                      |
| Dimensions (mm) | 311 * 237 * 104 mm                                                                                                                                      |
| IP Rating       | IP65 (Rainfall Resistant / Outdoor Use)                                                                                                                 |
| Flame Retardant | No                                                                                                                                                      |
| Splitter        | 2x1:8 tube splitter                                                                                                                                     |
| Adapters        | Can load 16 pcs SC simplex adapter Max. for 24 fibers splice                                                                                            |
| Splice Tray     | Can accommodate 2pcs 1x8 or 1pc 1x16 PLC splitter                                                                                                       |
| Ports           | Input 2 ports Suitable for cables diameter 8mm Support Cable uncut applications<br>Output 16 FTTH Drop cables ports 3*2 mm with drop cable fixing parts |
| Applications    | Wall Mounting and pole mounting applications available                                                                                                  |

# OTB-0616AOHK-R

Fiber Optic Termination Box 16 FO



## Measures:

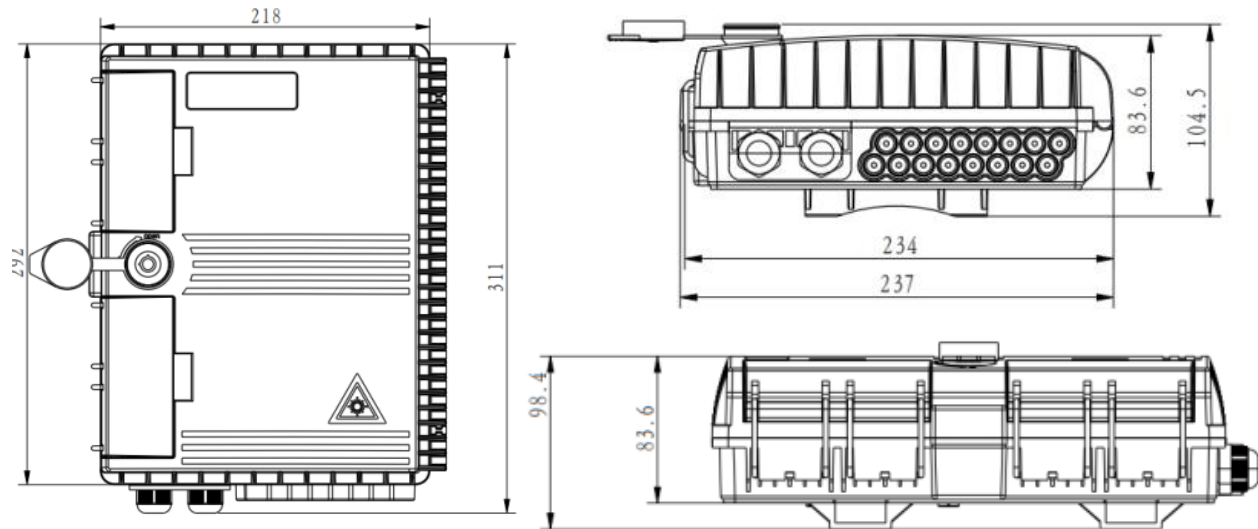

## Applications:

- FTTH access network
- Telecommunication Networks
- CATV Networks
- Data communications Networks
- Local Area Networks