

OTB-0648AOK

Fiber Optic Termination Box 48 FO




Fiber Optic Terminal Box — Designed for fiber splicing, distribution, and protection. The practical internal layout ensures neat fiber routing and bend-radius control. Suitable for outdoor wall-mounted and pole-mounted installations.

Features:

Specification	
Material	ABS Plastic
Dimension (mm)	232 x 359 x 130.5 mm
Splice Trays	4pcs 1x12 individual trays Max. 48 fibers
Adapter Port	24pcs SC simplex adapters
Splitter	Can load 2pcs 1:8 PLC splitter or 1pc PLC 1:16 steel tube type splitter
Cable ports	2pcs $\Phi 19$ mm entry cable ports
	24pcs 2*3mm drop cable ports
Application	Wall Mounting and Pole Mounting
IP Rating	IP65 (Outdoor use, waterproof)

Dimension:

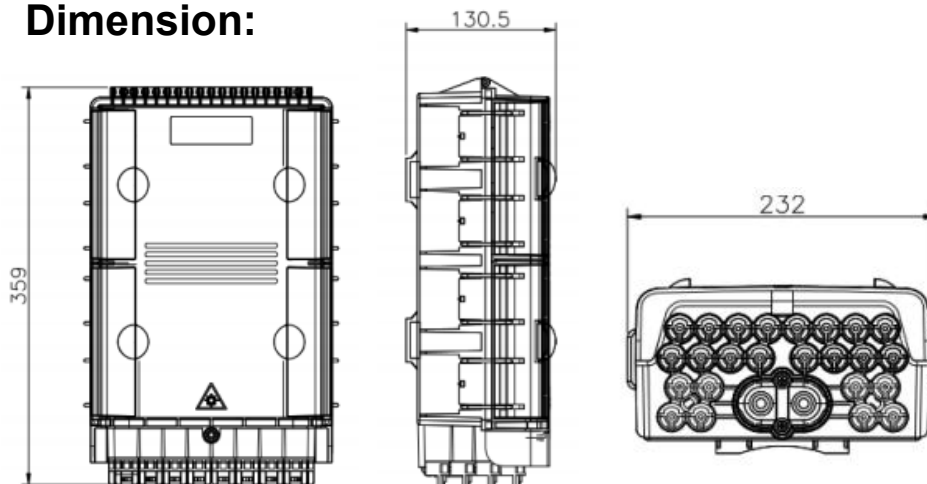

Applications:

- FTTH access network
- Telecommunication Networks
- CATV Networks
- Data communications Networks
- Local Area Networks