OTB-0616AOHK-R

Fiber Optic Termination Box 16 FO

Cablix ™

OTB-0616AOHK-R is a plastic fiber optic terminal box that suitable for optical fiber splicing, distribution, and protection. Can connect the drop cable with feeder cable as the termination point in the Fttx network, it can help splicing, splitting, storage and management with suitable space.
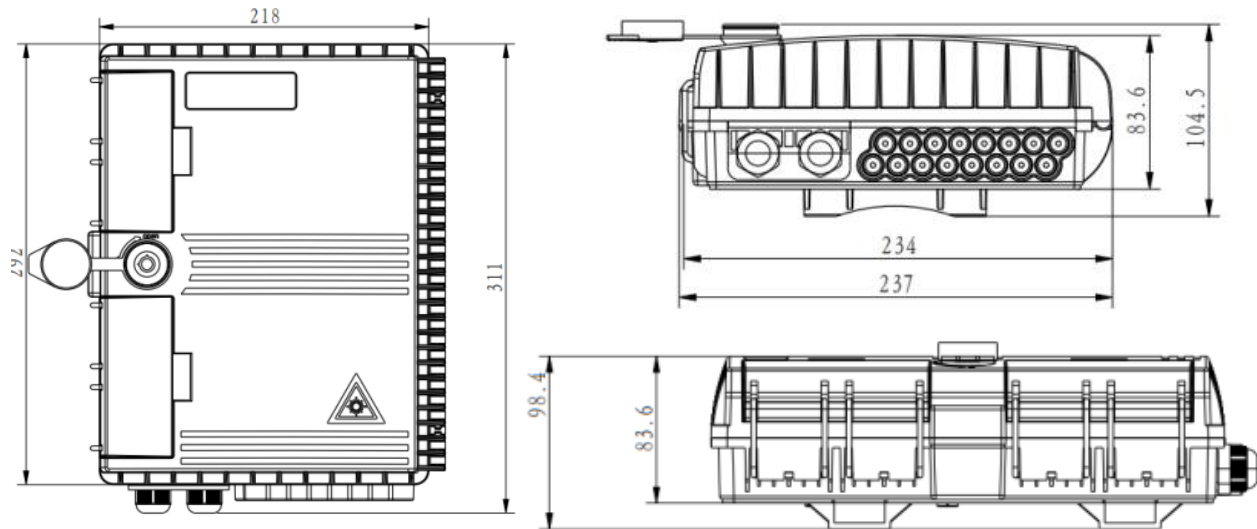
Features:

Specifications	
Material	PC+ABS material, UV resistant
Color	Black, Grey, White
Dimensions (mm)	311 * 237 * 104 mm
IP Rating	IP65 (Rainfall Resistant / Outdoor Use)
Flame Retardant	No
Splitter	2x1:8 tube splitter
Adapters	Can load 16 pcs SC simplex adapter Max. for 24 fibers splice
Splice Tray	Can accommodate 2pcs 1x8 or 1pc 1x16 PLC splitter
Ports	Input 2 ports Suitable for cables diameter 8mm Support Cable uncut applications Output 16 FTTH Drop cables ports 3*2 mm with drop cable fixing parts
Applications	Wall Mounting and pole mounting applications available

OTB-0616AOHK-R

Fiber Optic Termination Box 16 FO

Measures:

Applications:

- FTTH access network
- Telecommunication Networks
- CATV Networks
- Data communications Networks
- Local Area Networks